



# Euro Die Cast Top Cable Entry Hood with Long Thumbscrews

### TECHNICAL SPECIFICATIONS

<b>Material:</b>	Zinc, Nickel plated
<b>Operating Temperature:</b>	-40°C to +120°C
<b>Cable Entry:</b>	Top
<b>Thumbscrews:</b>	UNC 4-40 (standard) M2,5/M2,6 or M3,0 on request
<b>Cable Diameter:</b>	From 4,3 mm Up to 13,0 mm
<b>Screening Test:</b>	SP Swedish National Testing and Research Institute



Screening Effectiveness

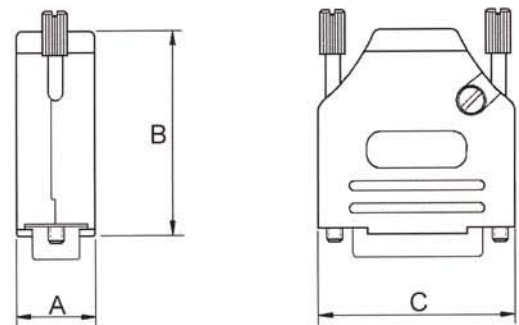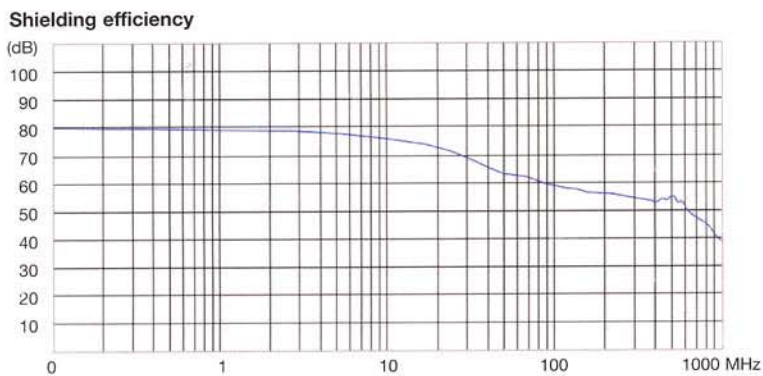

### Features:

- Available in sizes 9-15-25-37
- Excellent EMI Shielding
- Re-openable
- Strain relief inserts ensure a secure termination
- Full Metal Jackscrew as standard.  
Plastic knob on Request.  
Metalized (RAHI) grommets on request.

Size	Dim A	Dim B	Dim C
9-way	15,0	39,9	31,2
15-way	15,0	41,5	39,5
25-way	15,0	48,6	53,4
37-way	15,0	53,6	69,7